

FM80-N

85 kg Self-contained Ice Machine

CommercialIce[®]
A U S T R A L I A

Technical features

- Electronic control
- Stainless steel bodywork - scotch brite
- Air or water cooled
- Direct transmission
- Easily accessible components
- Low power and water consumption
- Reduced dimensions
- Continuous production



Internal bin capacity

25kg of ice storage




Type of ice

Nugget Ice



Residual water content 8%



Voltage

230/50/1 Standard version

Machine dimensions

Net size WxDxH	529 x 626 x 880 mm
Net weight	51 kg
Shipping size WxDxH	0 x 0 x 0 mm
Shipping weight	59 kg

Technology and Certifications




**Factory 12, Sandown Square
56 Smith Rd Springvale Vic 3171**

**www.commercialiceaustralia.com.au
1300 007 747**


FM80-N

85 kg Self-contained Ice Machine

CommercialIce
AUSTRALIA

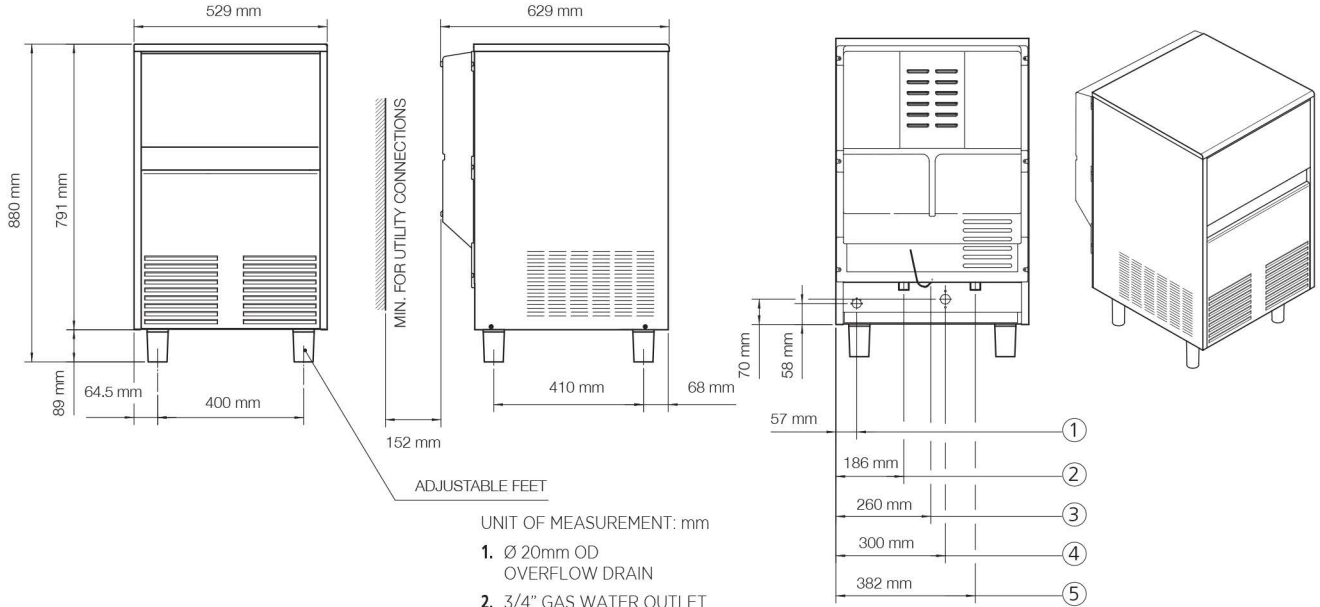

DRAINAGE PER GRAVITY

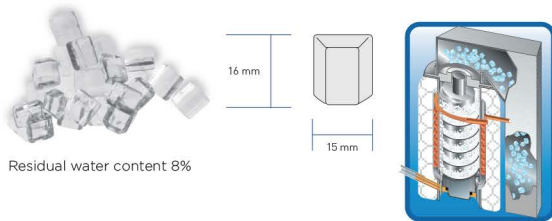

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg 10°C/10°C	Power input Watt (*)	Refrigerant		Fuse A	Consumptions		
				Type	Charge kg		kWh/100kg	kWh/24h	Water l/h (**)
SMI 80 A	230/50/1	85	448	R404A	0.43	10	n.a.	n.a.	2.7
SMI 80 W	230/50/1	85	350	R404A	0.42	10	n.a.	n.a.	56.0
SMI 80 A	220/60/1	85	n.a.	R134a	n.a.	10	n.a.	n.a.	n.a.
SMI 80 W	220/60/1	85	n.a.	R404A	n.a.	10	n.a.	n.a.	n.a.

(*) Power Input: at 43°C Ambient Temperature
(**) Water Consumption: at 32°C Air and 21°C Water

Factory 12, Sandown Square
56 Smith Rd Springvale Vic 3171

www.commercialiceaustralia.com.au
1300 007 747