



SDH100

SIMAG

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290




Internal bin capacity



33 kg of Ice
1570 cubes

Type of ice

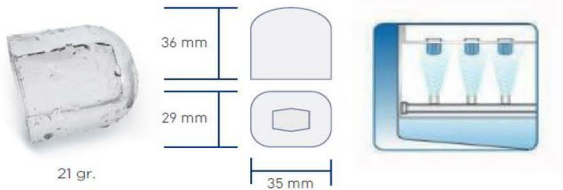

Voltage

230/50/1 Standard version

Machine dimensions

Net size WxDxH	670 x 595 x 981 mm
Net weight	63 kg
Shipping size WxDxH	740 x 670 x 1080 mm
Shipping weight	74 kg

Technology and Certifications




**Factory 12, Sandown Square
56 Smith Rd
Springvale Vic 3171**



SDH100

SIMAG

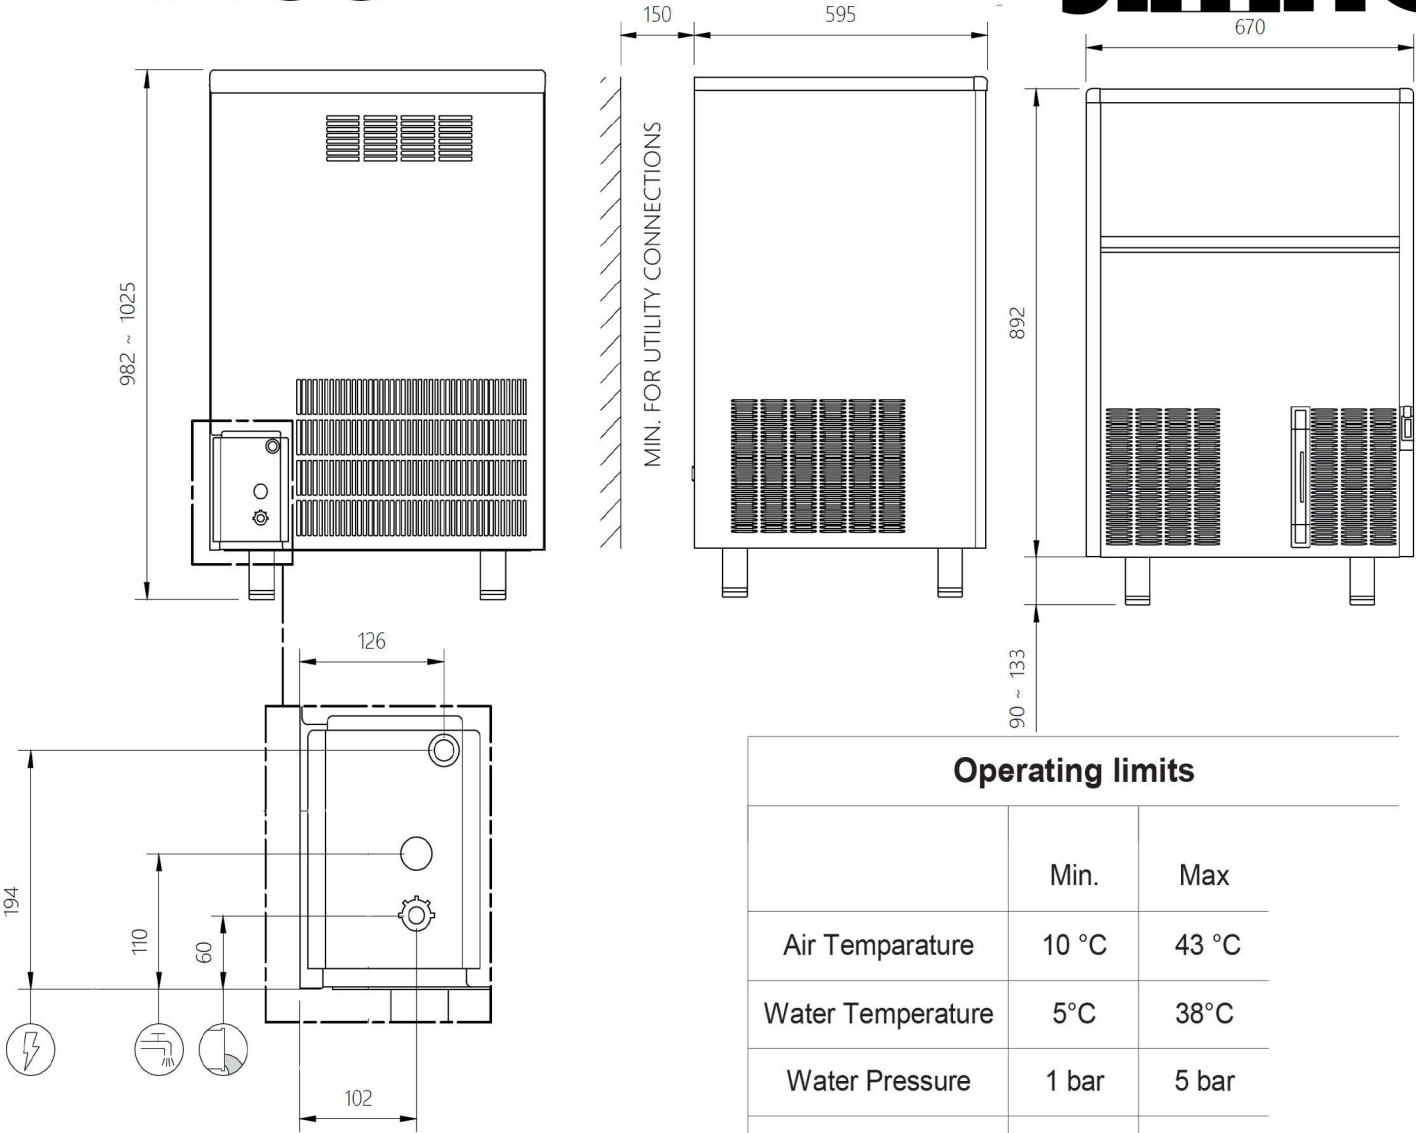

Operating limits		
	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/ 100kg	kWh/ 24h	Water l/h
SDH100	230/50/1	100	99	810	R290	0,14	10	18,5	15,5	10,1

(**) Water Consumption: at 32°C Air and 21°C Water

(*) Power Input: at 43°C Ambient Temperature