



SDH170

SIMAG


	FEATURES • Resistant stainless steel exterior. • Easy, front panel access to technical / service area of the machine. • Reduced dimensions • R290 refrigerant • Low power and water consumption • Optimum ratio between ice production and bin capacity 																	
	CONDENSING SYSTEM Air cooled	Factory 12, Sandown Square 56 Smith Rd Springvale Vic 3171																
	REFRIGERANT GAS R290																	
	VOLTAGE V/HZ/PH 230\50\1																	
CERTIFICATIONS 	OPERATING REQUIREMENTS <table><tr><td></td><td>Minimum</td><td>Maximum</td></tr><tr><td>Air temperature</td><td>10</td><td>43</td></tr><tr><td>Water temperature</td><td>5</td><td>38</td></tr><tr><td>Water pressure</td><td>1 bar (14 psi)</td><td>5 bar (70 psi)</td></tr><tr><td>Electrical voltage</td><td>-10%</td><td>+10%</td></tr></table>				Minimum	Maximum	Air temperature	10	43	Water temperature	5	38	Water pressure	1 bar (14 psi)	5 bar (70 psi)	Electrical voltage	-10%	+10%
	Minimum	Maximum																
Air temperature	10	43																
Water temperature	5	38																
Water pressure	1 bar (14 psi)	5 bar (70 psi)																
Electrical voltage	-10%	+10%																

Self Contained Ice Machine 158 kg



SDH170

SIMAG

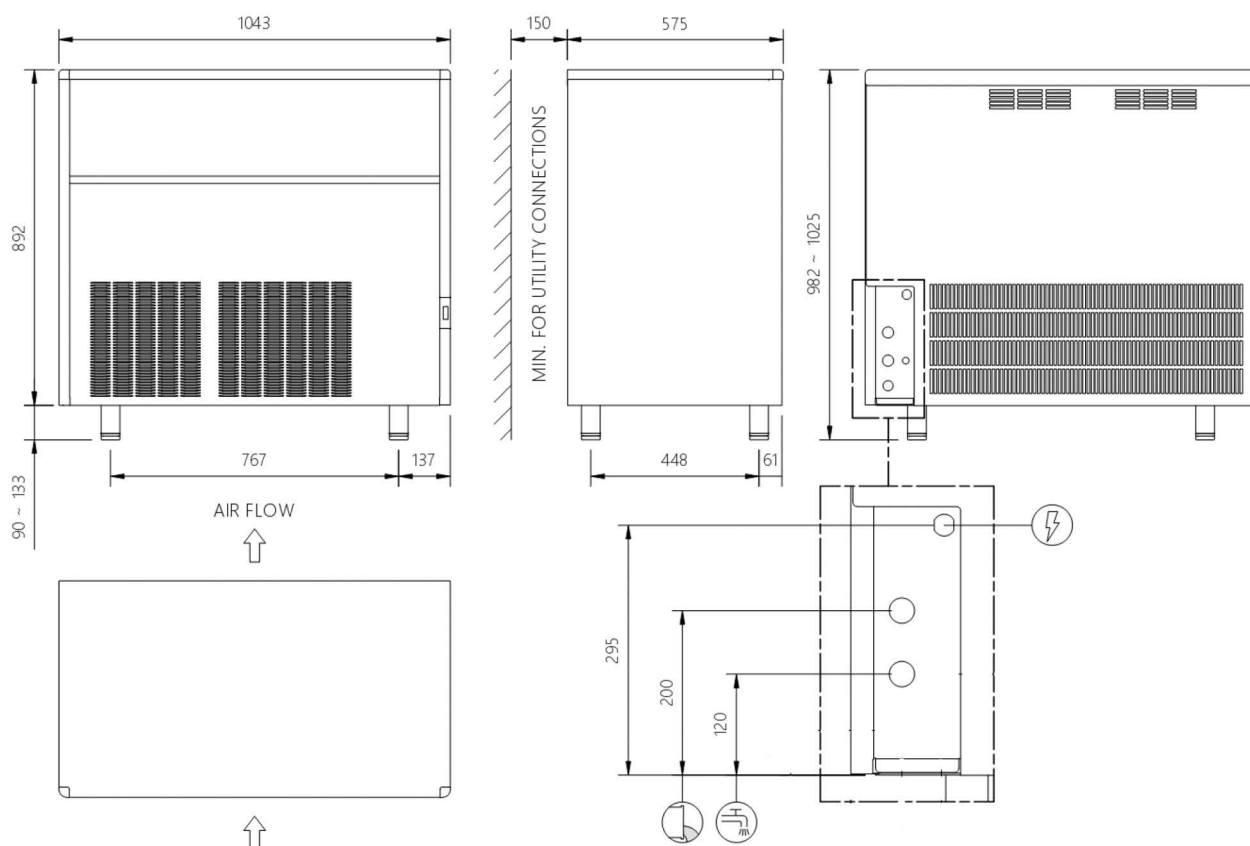

UNIT OF MEASUREMENT: mm

[illegible]