



SDH24

SIMAG

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290



Internal bin capacity




6 kg of ice

290 cubes

Type of ice

Hollow Cubes

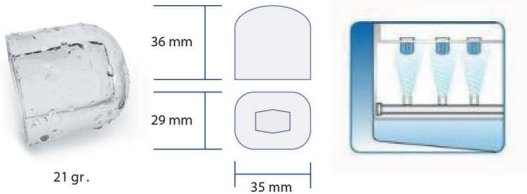

Voltage

230/50/1 Standard version

Machine dimensions

Net size WxDxH	334 x 457 x 599 mm
Net weight	28 kg
Shipping size WxDxH	400 x 530 x 690 mm
Shipping weight	33 kg

Technology and Certifications




**Factory 12, Sandown Square
56 Smith Rd
Springvale Vic 3171**



SDH24

SIMAG

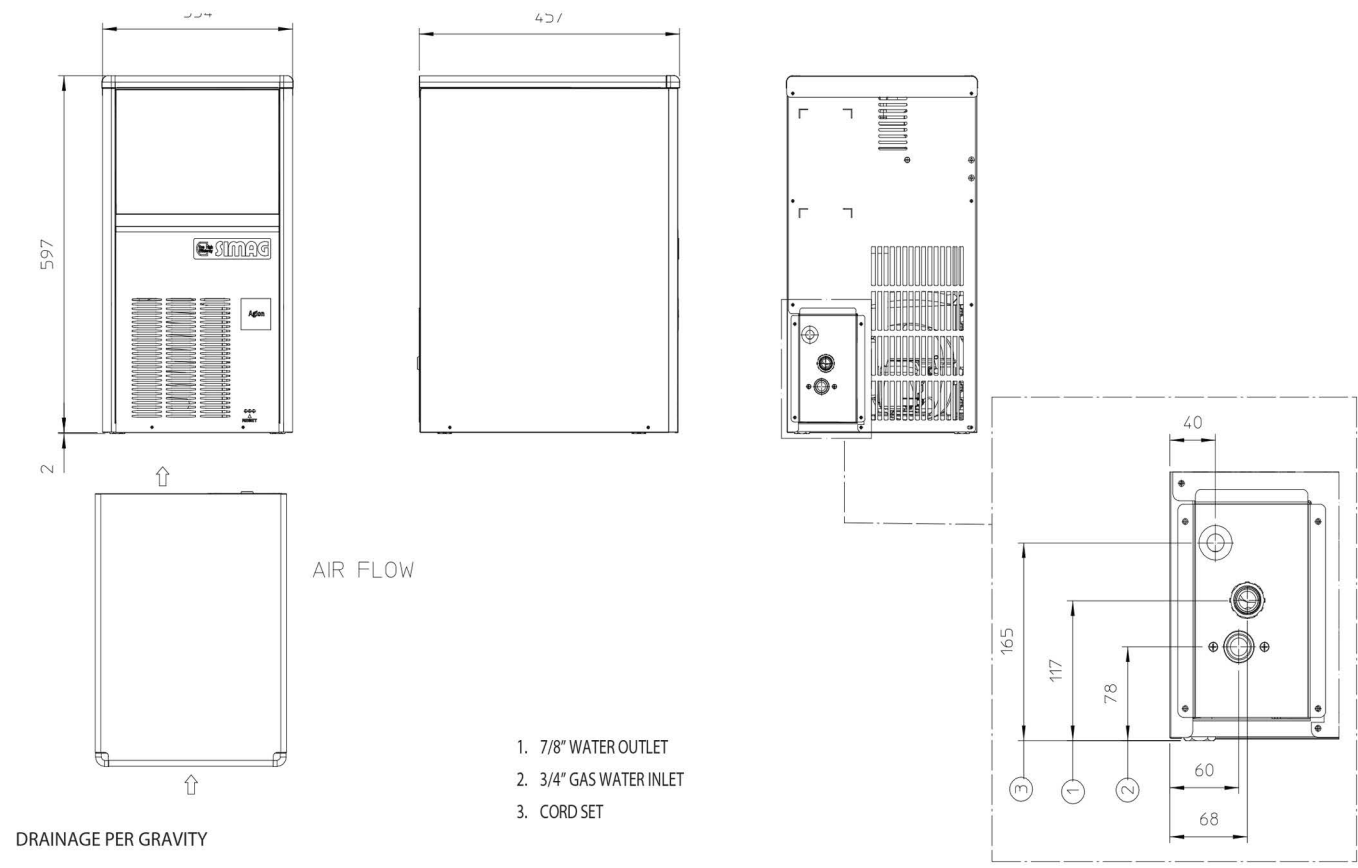

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design
are subject to change without notice

Model	Voltage	Daily production kg		Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge kg		kWh/ 100kg	kWh/ 24h	Water l/h
SDH24	230/50/1	25	21	250	R290	0.075	10	33.1	5	3.0

(**) Water Consumption: at 32°C Air and 21°C Water

(*) Power Input: at 43°C Ambient Temperature