



SCH105

SIMAG

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290



Internal bin capacity



49 kg of Ice

2450 cubes

Type of ice




20 g

34 mm



30 mm



Voltage

230/50/1 Standard version

Machine dimensions

Net size WxDxH	700 x 600 x 1062 mm
Net weight	56 kg
Shipping size WxDxH	770 x 680 x 1050 mm
Shipping weight	68 kg

Technology and Certifications




**Factory 12, Sandown Square
56 Smith Road
Springvale Vic 3171**



SCH105

SIMAG

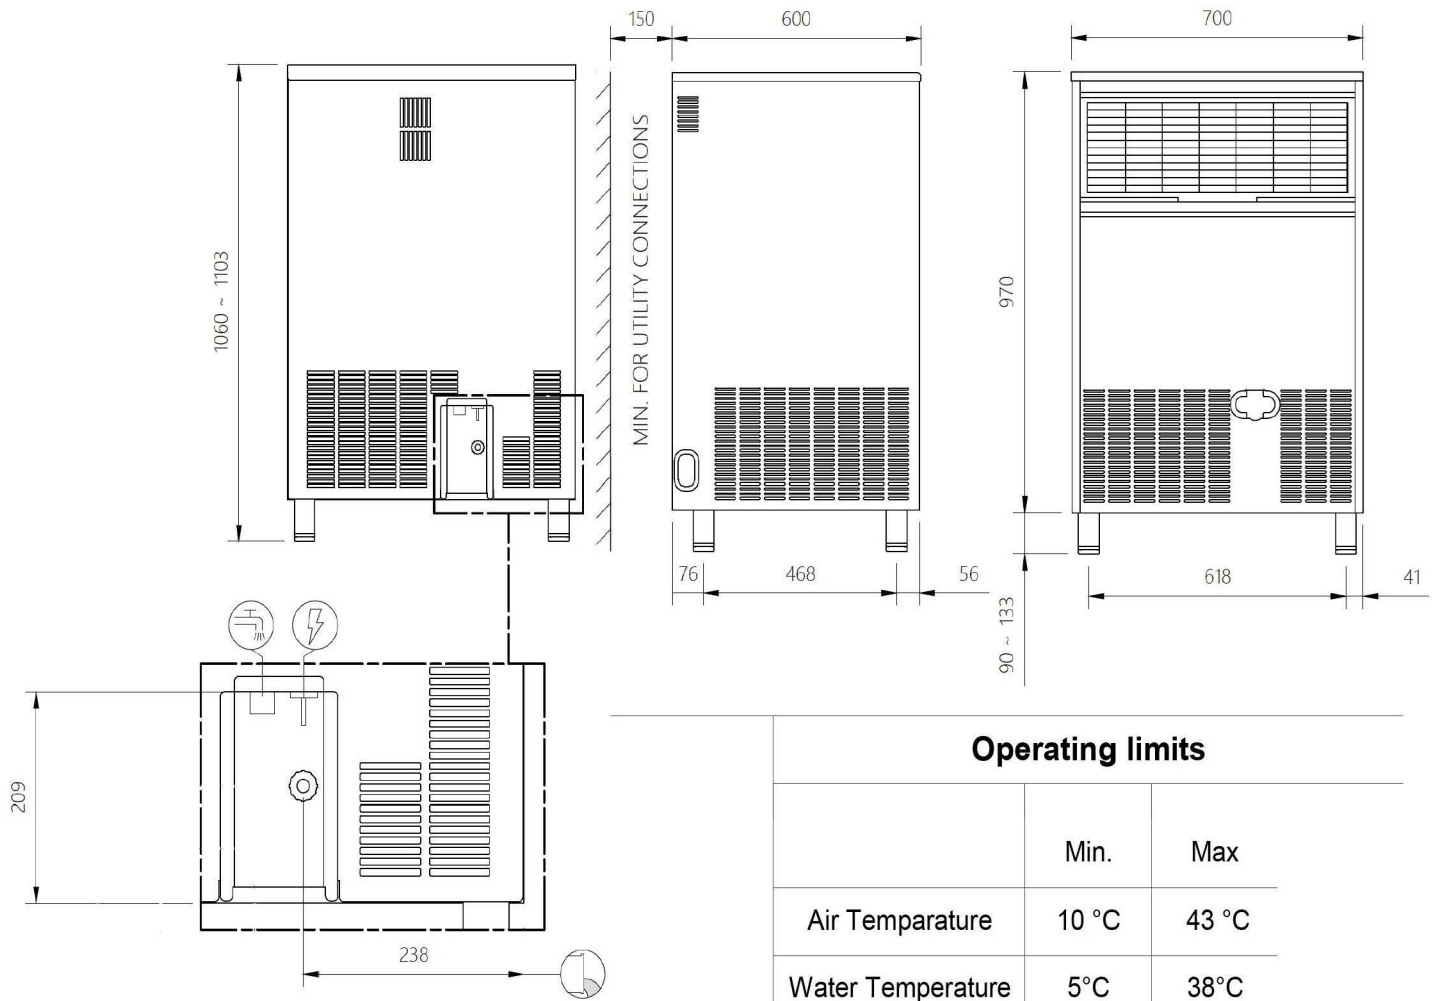

Operating limits

	Min.	Max
Air Temperature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production Kg		Power Input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge Kg		kWh/ 100kg	kWh/ 24h	Water l/h
SCH105	230/50/1	90	87	770	R290	0,120	10	20,7	14,7	8,5

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water