

SCH30

Technical features

- · Stainless steel bodywork scotch brite
- Vertical pump
- · Built-in cleaning system
- · Easily accessible components
- · Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- · Double defrosting system
- Refrigerant R290




SIMAG



Internal bin capacity



Type of ice



Voltage

230/50/1 Standard version

Machine dimensions

Net size WxDxH 670 x 595 x 981 mm

Net weight 63 kg

Shipping size WxDxH 740 x 670 x 1080 mm

Shipping weight 74 kg

Technology and Certifications







Factory 12, Sandown Square 56 Smith Road Springvale Vic 3171



SCH30

SIMAG

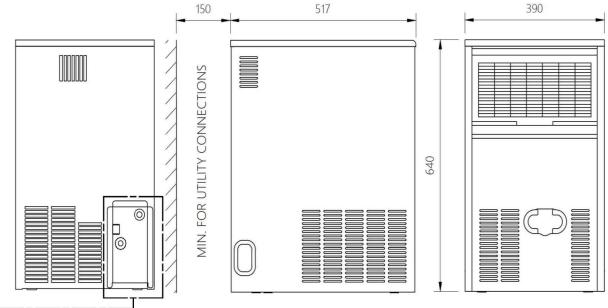



Operating limits

	Min.	Max
Air Temparature	10 °C	43 °C
Water Temperature	5°C	38°C
Water Pressure	1 bar	5 bar
Voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily prod	Power Input Wati		Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C	(*)	Туре	Charge Kg		kWh/ 100kg	kWh/ 24h	Water I/h
SCH30	230/50/1	31	29	340	R290	0,08	10	27,2	6,8	4,3

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water