



SDH30

SIMAG

Technical features

- Stainless steel bodywork - scotch brite
- Vertical pump
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R290



Internal bin capacity	Type of ice
6 kg of ice 290 cubes	Hollow Cubes 21 gr.
Machine dimensions	
Voltage	Net size WxDxH 334 x 457 x 599 mm
230/50/1 Standard version	Net weight 28 kg
	Shipping size WxDxH 400 x 530 x 690 mm
	Shipping weight 33 kg


Technology and Certifications

**Factory 12, Sandown Square
56 Smith Rd
Springvale Vic 3171**



SDH30

SIMAG

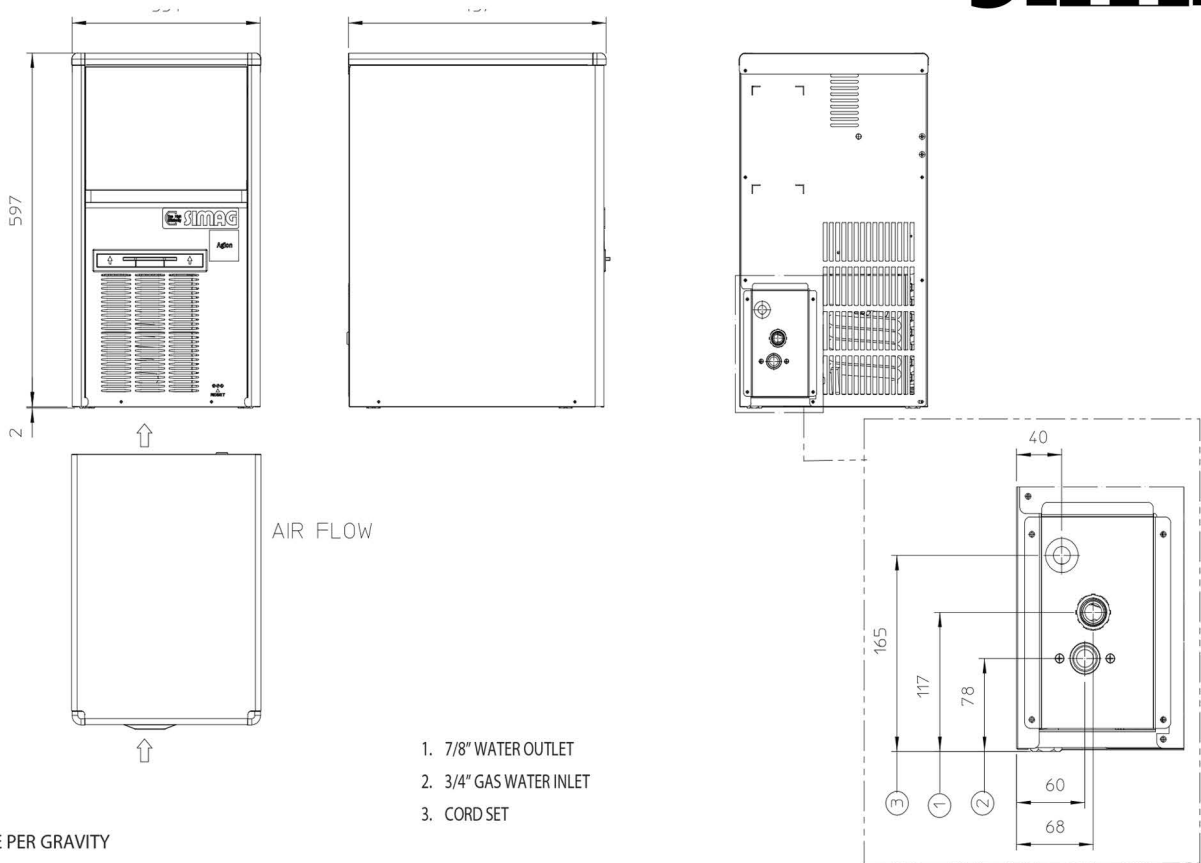

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design
are subject to change without notice

Model	Voltage	Daily production kg		Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
		10°C/10°C	21°C/10°C		Type	Charge kg		kWh/ 100kg	kWh/ 24h	Water l/h
SDH30	230/50/1	32	27	312	R290	0.095	10	29.75	5.95	3.8

(**) Water Consumption: at 32°C Air and 21°C Water

(*) Power Input: at 43°C Ambient Temperature