



SPH255



FEATURES

- Electronic control board with self diagnostic and malfunction alarms.
- Resistant stainless steel exterior.
- Easy, front panel access to technical / service area of the machine.
- Continuous production
- Direct trasmission
- R290 refrigerant



**CONDENSING
SYSTEM**
Air cooled

RECOMMENDED BIN

BIN

KG

REFRIGERANT GAS
R290

**VOLTAGE
V/HZ/PH**
230\50\1

**Factory 12, Sandown Square
56 Smith Rd
Springvale Vic 3171**

Modular Ice Machine 199 kg

CERTIFICATIONS



OPERATING REQUIREMENTS


	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%



SPH255

SIMAG

Modular Ice Machine 199 kg

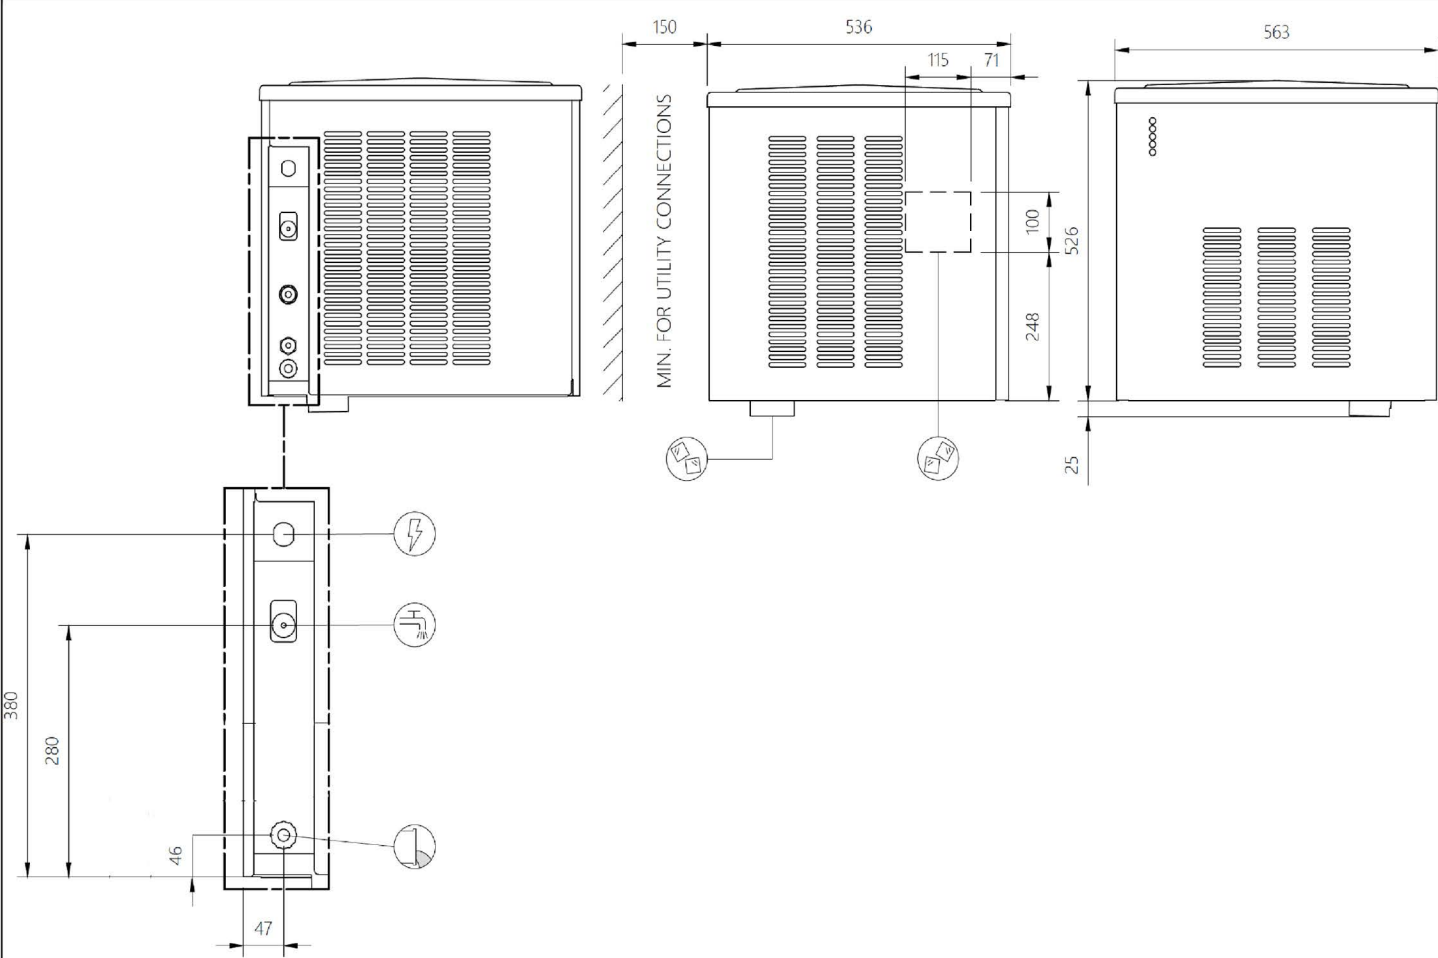

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions					
Size (W x D x H)			Size (W x D x H)								
Net weight			Gross weight								
560 x 533 x 525 mm			680 x 610 x 630 mm								
52 kg			56kg								
			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
			kg	kg	kg						
SPH255	230\50\1	A	200	199	170	1,5	15	7	695	3 x 1,5	10